


# Model 3138-N 17" Powered Unwind

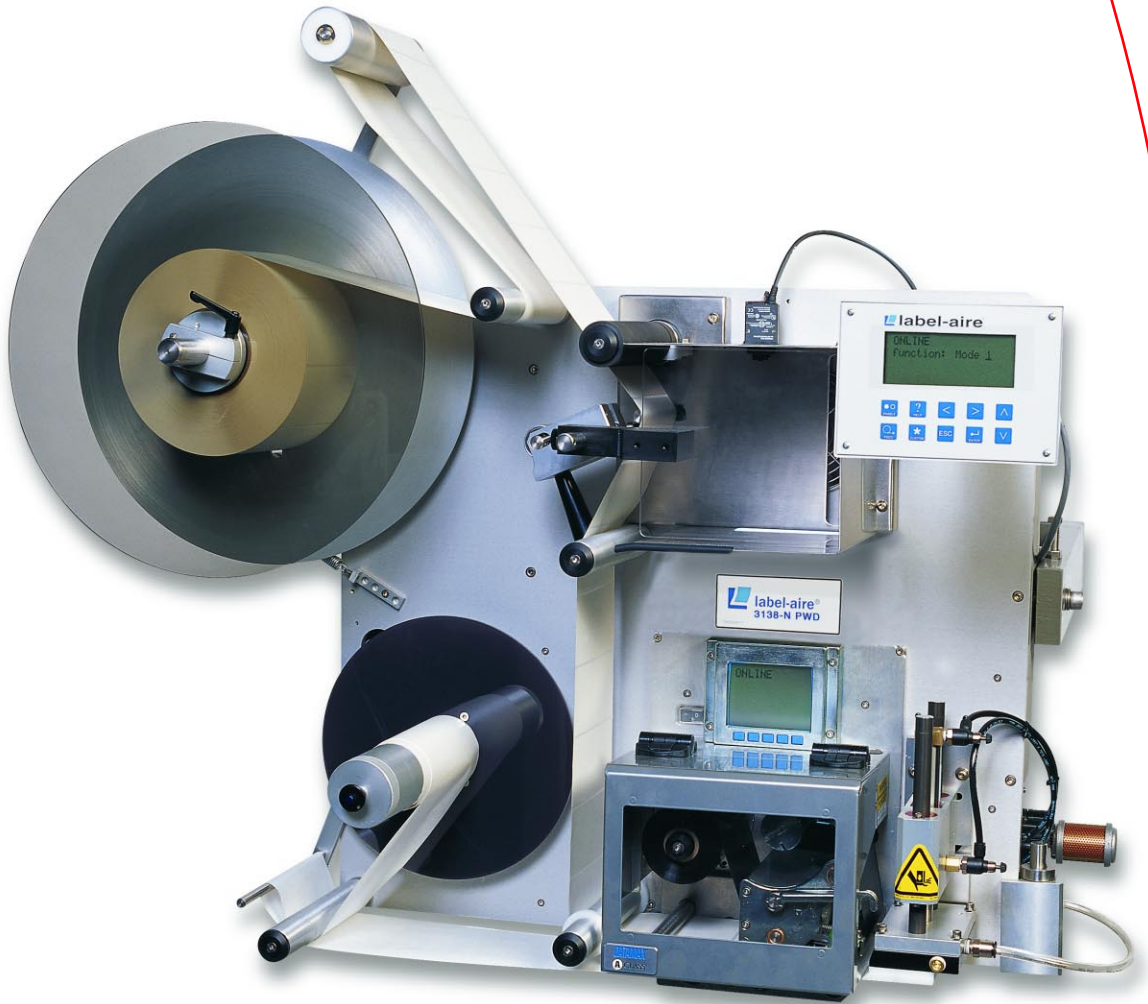

3138-N 17" Powered Unwind

Printer Applicator

# Powered Unwind

# Model 3138-N 17"

The Label-Aire® Model 3138-N Printer Applicator makes print-and-apply labeling easier...the 17" (432 mm) Powered Unwind configuration helps to significantly reduce downtime making your business even more profitable.


The 3138-N 17" Powered Unwind printer applicator is every bit as advanced a workhorse as the standard 3138-N and has all the same key features. Advanced features include automatic setup with multiple programmable label pages for easy change-overs to labels of different sizes, rate compensation for improved label placement accuracy, and advanced user-configurable I/O connectivity. All these handy features greatly simplify setup and change-overs. Like all 3138 models, the 3138-N 17" Powered Unwind is just as tough as it is versatile and advanced. The increased roll capacity of the large 17" (432 mm) powered unwind is perfect for high-speed, heavy duty operation. The 3138-N's rugged stainless steel and anodized aluminum construction is corrosion resistant providing long-lasting durability and maintenance-free operation in the most hostile environments. Like all Label-Aire printer applicators, the 3138-N 17" Powered Unwind is compatible with any O.E.M. printer on the market.

Put this advanced workhorse printer applicator to work for you all day, every day. The Model 3138-N 17" Powered Unwind Printer Applicator is built to meticulous quality standards and designed to operate reliably under the most intense conditions.

3138-N 17" Powered Unwind <small>Advanced Features</small>	
<b>17" (432 mm) powered unwind</b>	Geared for high-speed, heavy duty operation.
<b>Automatic setup</b>	Includes multiple programmable label pages for easy change-overs to different label sizes.
<b>Digital display</b>	Remote operator control capability.
<b>Flash memory</b>	Allows easy download of system software updates.
<b>Rate compensation (with optional encoder)</b>	For improved label placement accuracy.
<b>Advanced I/O</b>	User-configurable for system output.
<b>Heavy duty air cylinder</b>	For 24/7 label application.
<b>PLC outputs</b>	User-configurable for system output.
<b>3-color light stack</b>	Warns of "end of label/ribbon" and "low ribbon". "Low label" is available.

barcode labeling, data collection, distribution, inventory control, product I.D., retail, shipping, supply chain management, warehouse

# Powered Unwind

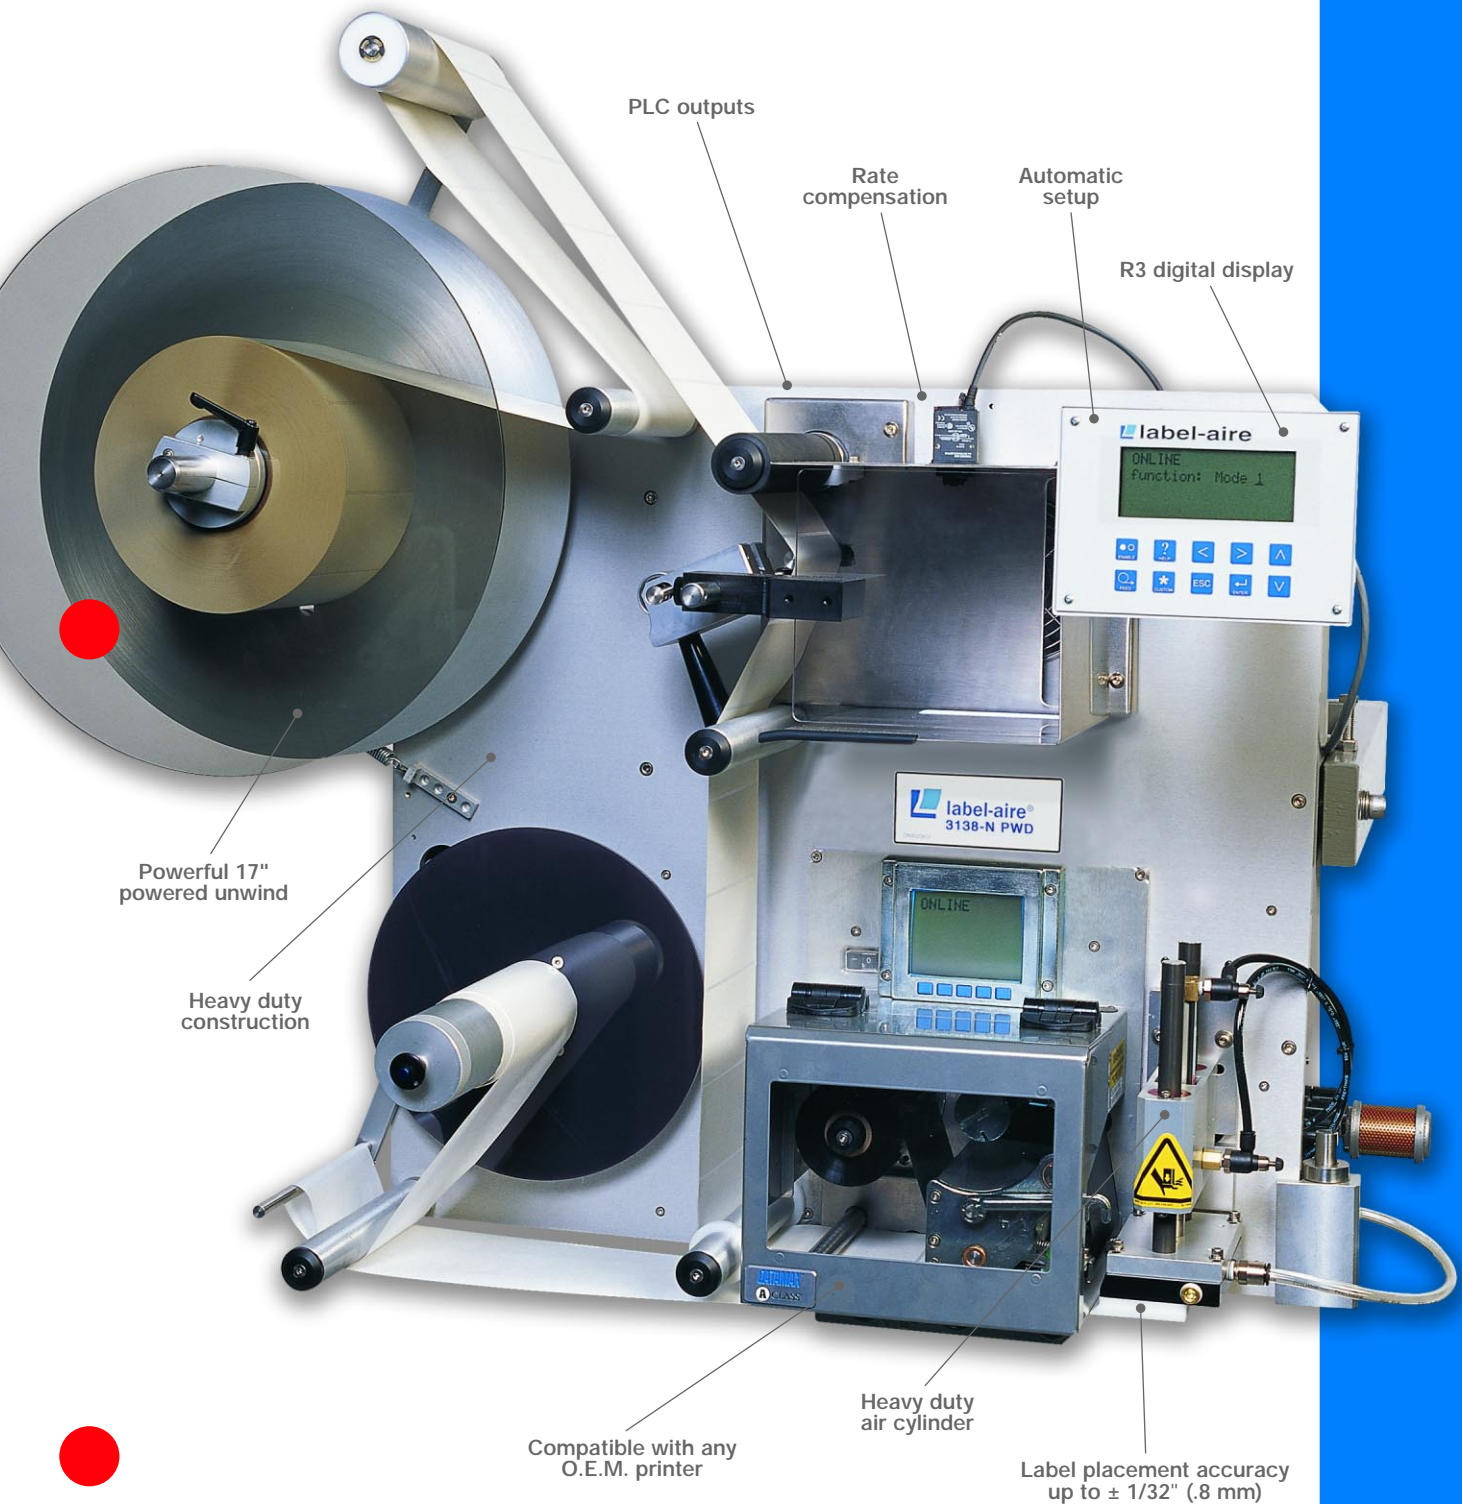

Model 3138-N 17" Powered Unwind Printer Applicator



# 3138-N 17" Powered Unwind Printer Applicator Specifications

## Dimensions:

Height: 33.8" (859 mm)  
Length: 39.9" (1013 mm)  
Width: 24.2" (615 mm)

## Weight:

Approx. 190 lbs. (86 kg)

## Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)  
Label Length: Up to 7" (178 mm)  
(Printer dependent)

## Dispense Speed:

Up to 12" (305 mm) per second  
depending on printer and label size

## Label Placement Accuracy:

+/- 1/32" (.8 mm)

## Electrical:

115 Volts AC 60 Hz 5 Amps.  
220 Volts AC 50 Hz 5 Amps.

## Air:


4 cfm at 90 psi for most applications

## Options:

All O.E.M. print engines  
Label on pad detection  
Dual Action Tamp (DAT) configuration\*  
90° swing tamp

**Consult factory for additional options.**

\*Consult factory for availability.

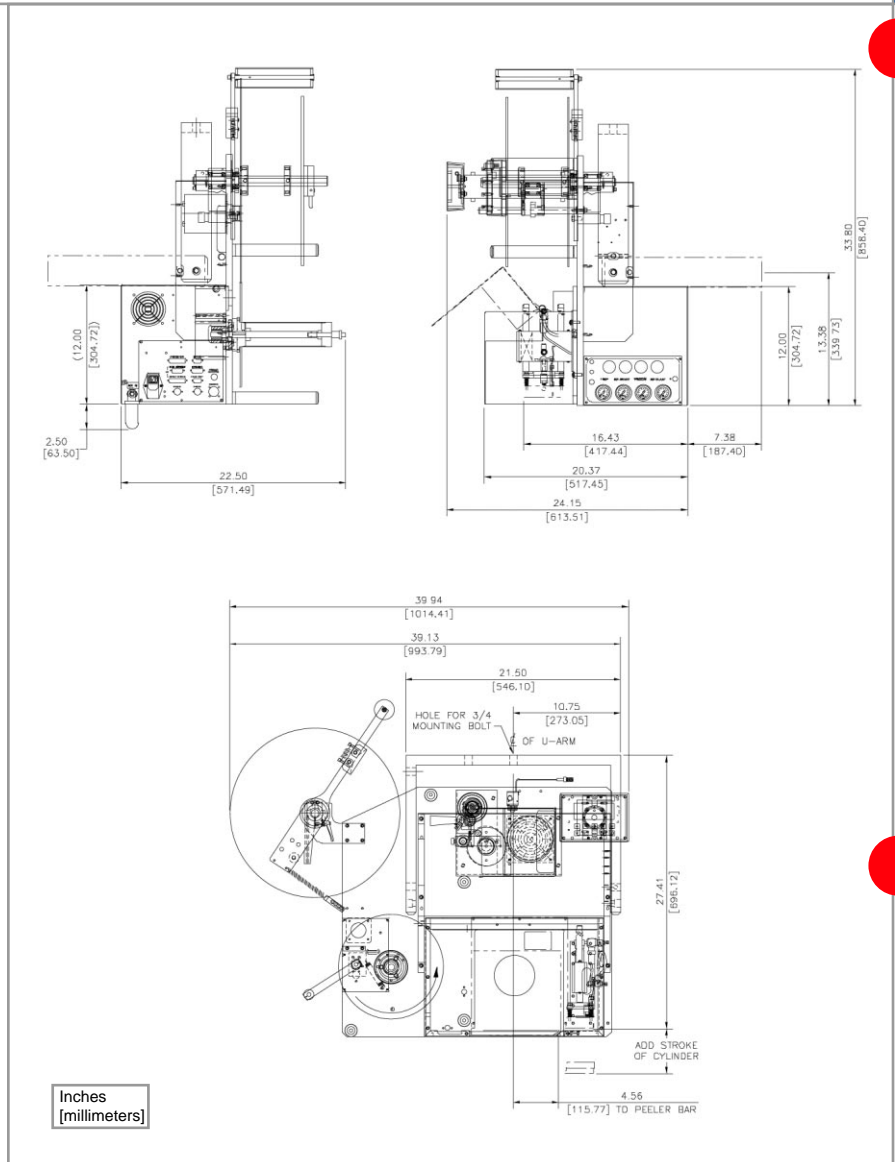

Distributed by:

